

FORD PERFORMANCE

M-6766-A50 2015-2017 Mustang 5.0L Oil / Air Separator Kit


NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF FORD PERFORMANCE PARTS © Ford Motor Company 2021

PRIOR TO INSTALLATION READ THESE INSTRUCTION COMPETELY For questions, Call the FORD PERFORMANCE Techline 1-800-367-3788

Please visit <u>https://www.performanceparts.ford.com</u> for warranty information

Kit contents:

- [1] CM-6766-A50 RH oil separator
- [1] CM-6K817-M50A inlet PCV hose
- [1] CM-6K817-M50B outlet PCV hose
- [2] W705436-S300 push pin

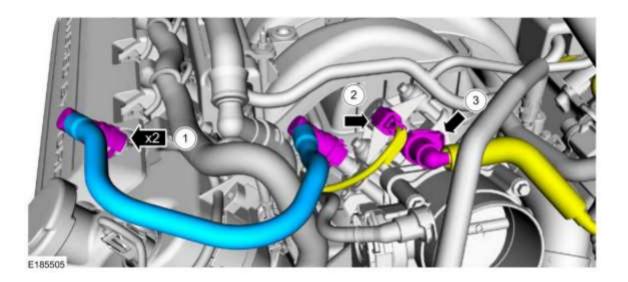



Remove PCV tube labeled #1 above. Release tab on connector as indicated.

Ford Factory Shop Manual purchase options <u>www.motorcraftservice.com</u>

Techline 1-800-367-3788

Page 1 of 3

IS M-6766-M50A 012524



FORD PERFORMANCE

M-6766-A50 2015-2017 Mustang 5.0L Oil / Air Separator Kit

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF FORD PERFORMANCE PARTS © Ford Motor Company 2021

Remove wiring harness from valve cover retention. (For GT350 installations, additional adjustments of the wiring harness is necessary to clear oil separator) Locate the oil separator on the camcover and install the 2 pushpins.



Ford Factory Shop Manual purchase options <u>www.motorcraftservice.com</u>

Techline 1-800-367-3788

IS M-6766-M50A 012524




FORD PERFORMANCE

M-6766-A50 2015-2017 Mustang 5.0L Oil / Air Separator Kit

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR WRITTEN PERMISSION OF FORD PERFORMANCE PARTS © Ford Motor Company 2021

If your oil separator has a hole in the molded bracket, reinstall wiring harness pushpin in that hole, for retention. Lightly lubricate the inner O-rings of the PCV tube connectors with engine oil and install tubes per the illustration.

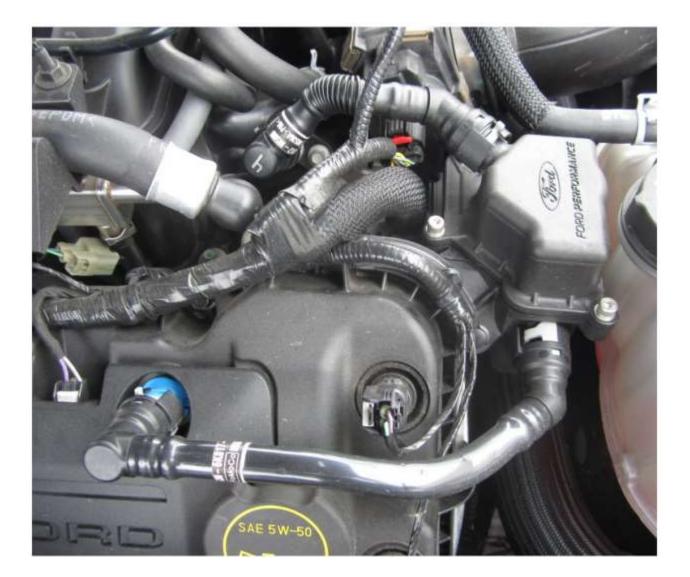

Maintenance is based on the type of driving the vehicle is subjected to. Track type driving will require more frequent checks for accumulation of oil in the separator. Remove separator and tilt so to empty oil out from the lower fitting. Do not empty from upper fitting! If removal of the top cover is required, when reinstalling, torque socket head screws to 4.5 to 5 Nm.

Ford Factory Shop Manual purchase options <u>www.motorcraftservice.com</u>

Techline 1-800-367-3788