

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

Please visit www.fordracingparts.com for the most current instruction information

!!! PLEASE READ ALL OF THE FOLLOWING INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION. AT ANY TIME YOU DO NOT UNDERSTAND THE INSTRUCTIONS, PLEASE CALL THE FORD RACING TECHLINE AT 1-800-367-3788 !!!

Verify kit contents before starting.

Kit Contents:

| Qty. | | Part Name |
|------|---------------|---------------------------|
| 1 | 1R3E-6L253-AA | LH TENSIONER ARM |
| 1 | 1R3E-6L253-BA | RH TENSIONER ARM |
| 1 | 1R3E-6M256-AA | RH CHAIN GUIDE |
| 1 | 2C5E-6B274-AB | LH CHAIN GUIDE |
| 1 | 2R3V-6D081-AA | LH FRONT COVER GASKET |
| 1 | 2R3V-6D081-BB | CENTER FRONT COVER GASKET |
| 1 | 2R3V-6D081-CA | RH FRONT COVER GASKET |
| 1 | F3AE-6700-AA | FRONT SEAL |
| 2 | 5W7E-6268-AA | PRIMARY TIMING CHAIN |
| 2 | F2LE-6268-BB | SECONDARY TIMING CHAIN |
| 1 | F7OE-6C270-EA | RH SECONDARY TENSIONER |
| 1 | F7OE-6C271-EA | LH SECONDARY TENSIONER |
| 1 | F81E-6L266-AA | RH CHAIN TENSIONER |
| 1 | F81E-6M269-AA | LH CHAIN TENSIONER |
| 1 | F8AE-6256-AA | RH CAM SPROCKET |
| 1 | F8AE-6256-BA | LH CAM SPROCKET |
| 4 | F8ZE-6256-AA | CAM SPROCKET |
| 2 | F2LE-6265-AD | CAM SPACER |
| 4 | N806164-S | CAM WASHER |
| 1 | XL3E-6306-AB | CRANKSHAFT SPROCKET |

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 1 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

Kit Contents (Cont.):

TIMING COMPONENT BOLT SET

| 2 | N605893-S309 | CHAIN GUIDE BOLT (M6 X 20) | |
|---|----------------------|---|--|
| 1 | N606527-S2 | CHAIN GUIDE BOLT (M6 X 67) | |
| 4 | N606543-S2 | CHAIN TENSIONER BOLT (M8 X 53) | |
| 1 | N804958-S2 | CHAIN GUIDE BOLT AND WASHER (M6 X 20) | |
| 2 | W500215-S437 | LH SECONDARY CHAIN TENSIONER BOLT (M6 X 27.5) | |
| 2 | W500304-S300 | RH SECONDARY CHAIN TENSIONER BOLT (M6 X 47) | |
| 2 | W705803-S | TENSIONER ARM STUD | |
| 4 | N811085-S2 | CAM BOLT (10 X 47.5) | |
| | FRONT COVER BOLT SET | | |
| 1 | W701512-S430 | DAMPER BOLT | |
| 1 | N806165-S2 | DAMPER WASHER | |
| 8 | N806177-S437 | FRONT COVER BOLT (M8 X 53) | |
| 5 | N806300-S2 | FRONT COVER STUD (M8 X 68 +M 8 X 30) | |
| 1 | W706560-S437 | FRONT COVER STUD (M8 X 65 + M8 X 16) | |
| 1 | W705128-S437 | FRONT COVER BOLT (M8 X 41) | |
| 1 | W706508-S437 | FRONT COVER STUD (M8 X 60 + M6 X 10) | |
| 1 | N808586-S437 | FRONT COVER STUD (M8 X 51 + M6 X 26) | |
| | | | |
| 1 | XW1E-12A227-AC | TRIGGER WHEEL | |

This instruction sheet has three sections.

The first section is overview of component locations. The second section is camshaft gear and chain installation. The third section is timing chain and tensioner installation.

WARNING: The installation of all gears and chains is done with the cam followers removed. Follower installation is done after the gears and chains are in place and properly timed.


Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 2 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

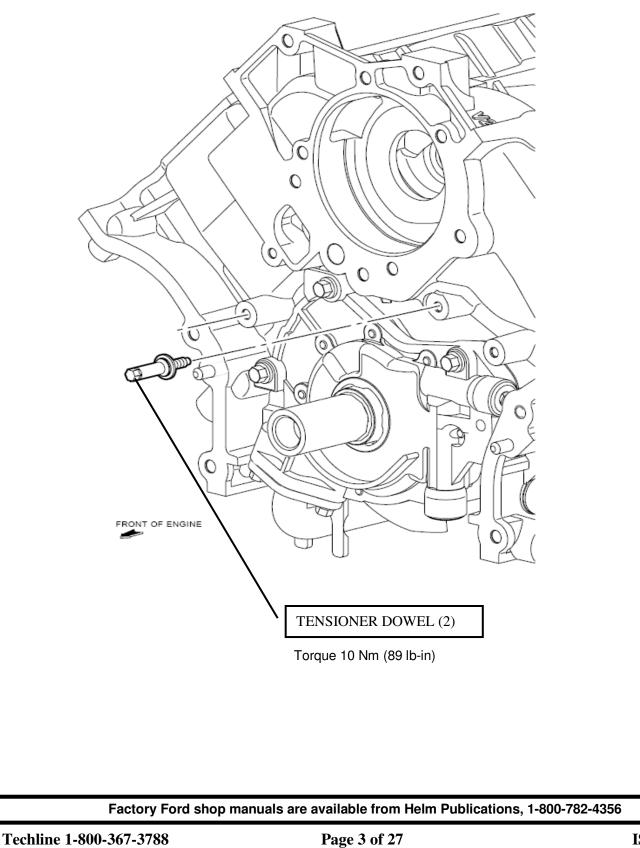



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

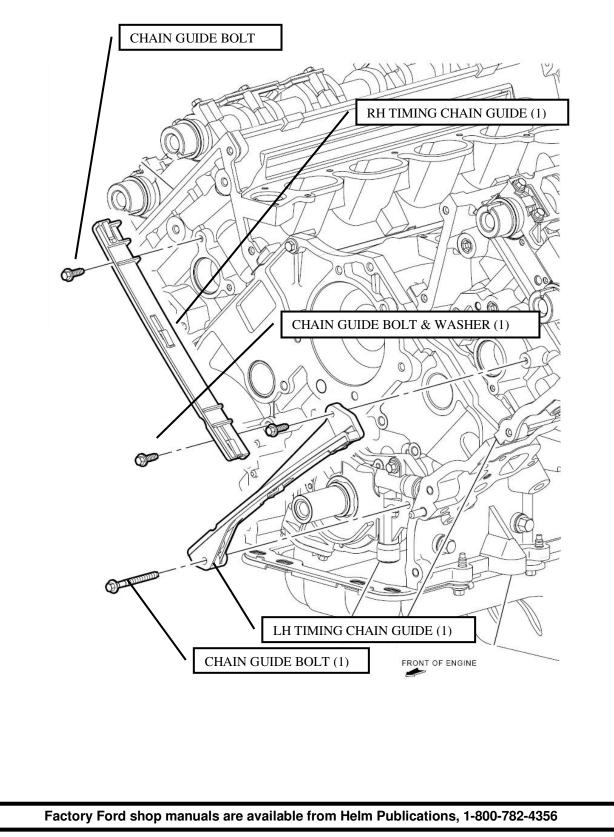


Techline 1-800-367-3788

Page 4 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

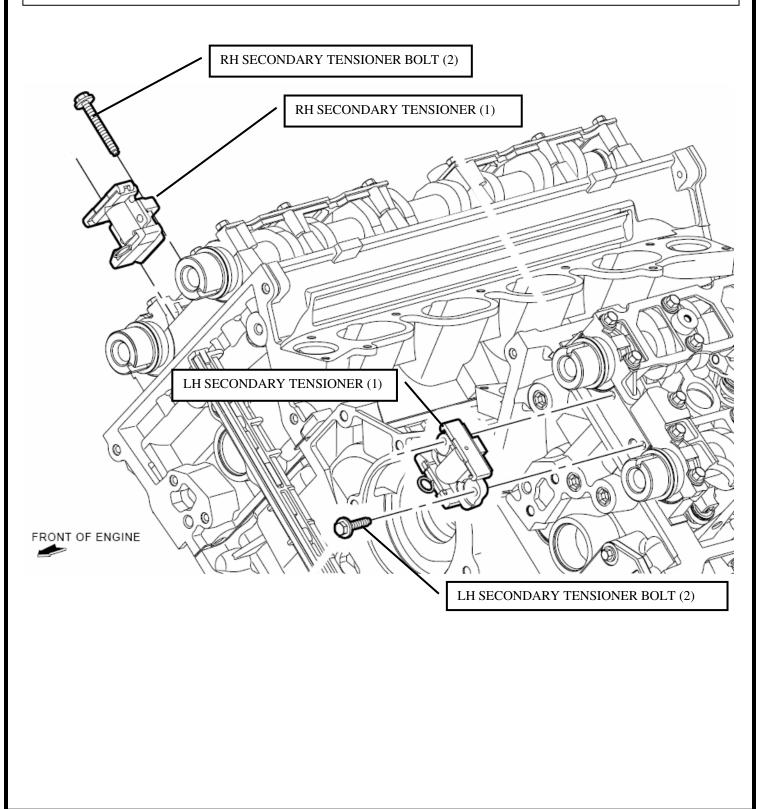


Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 5 of 27




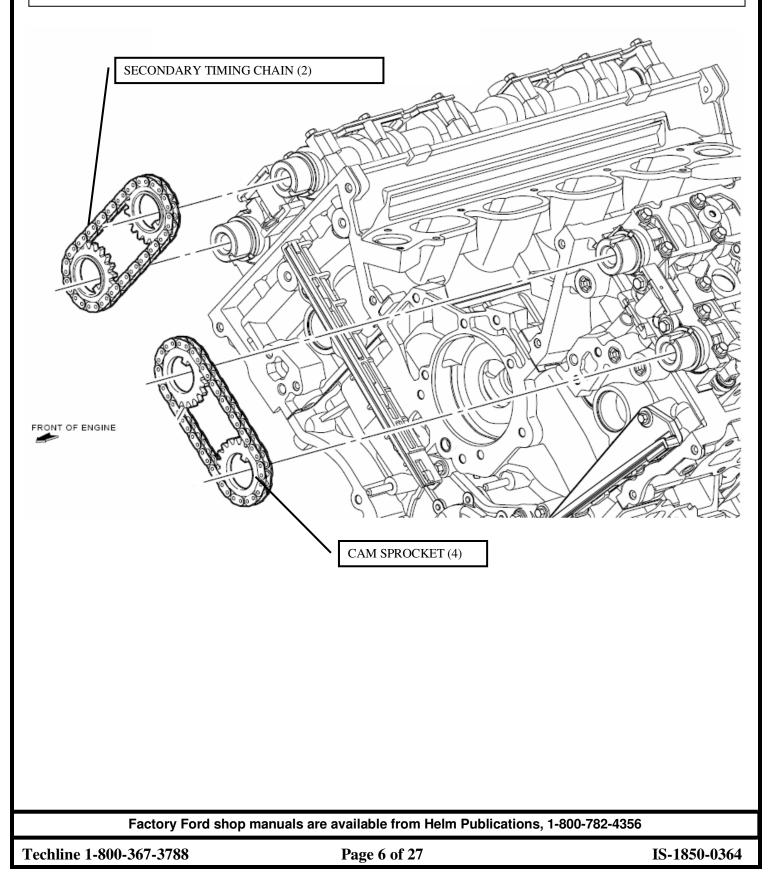




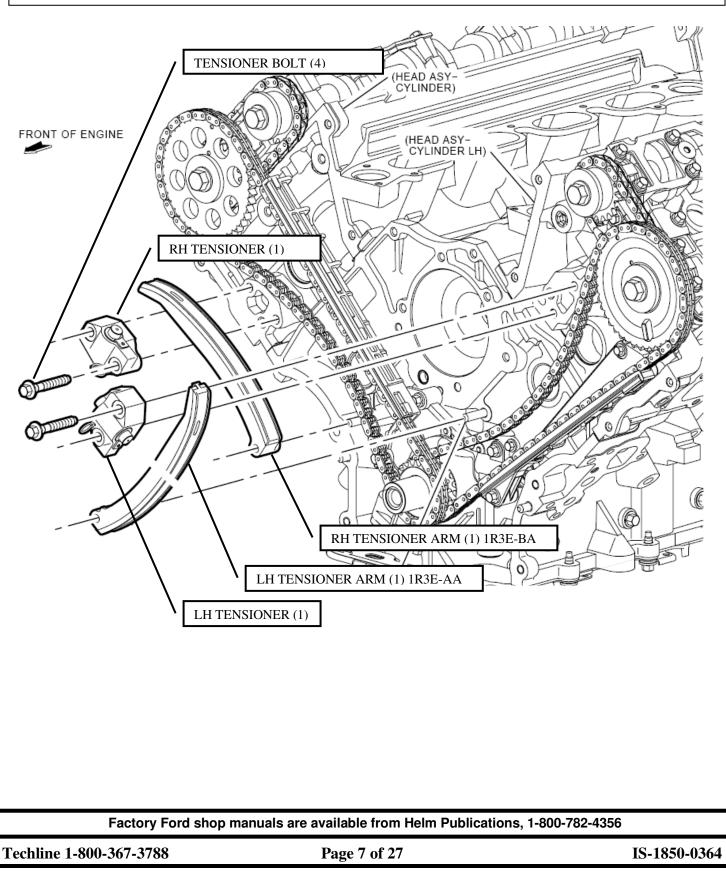




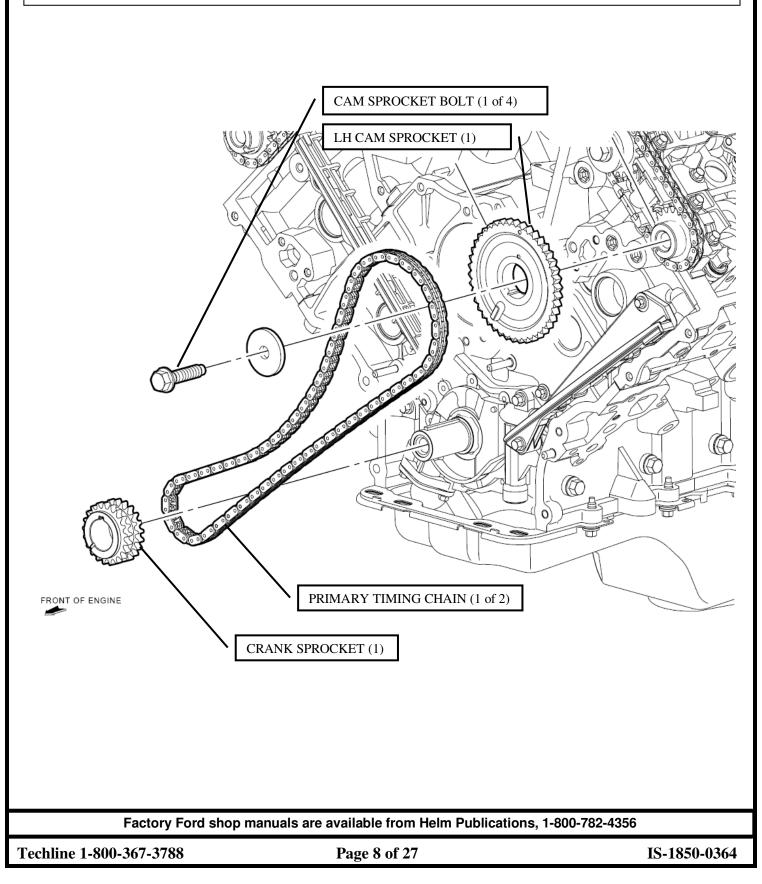




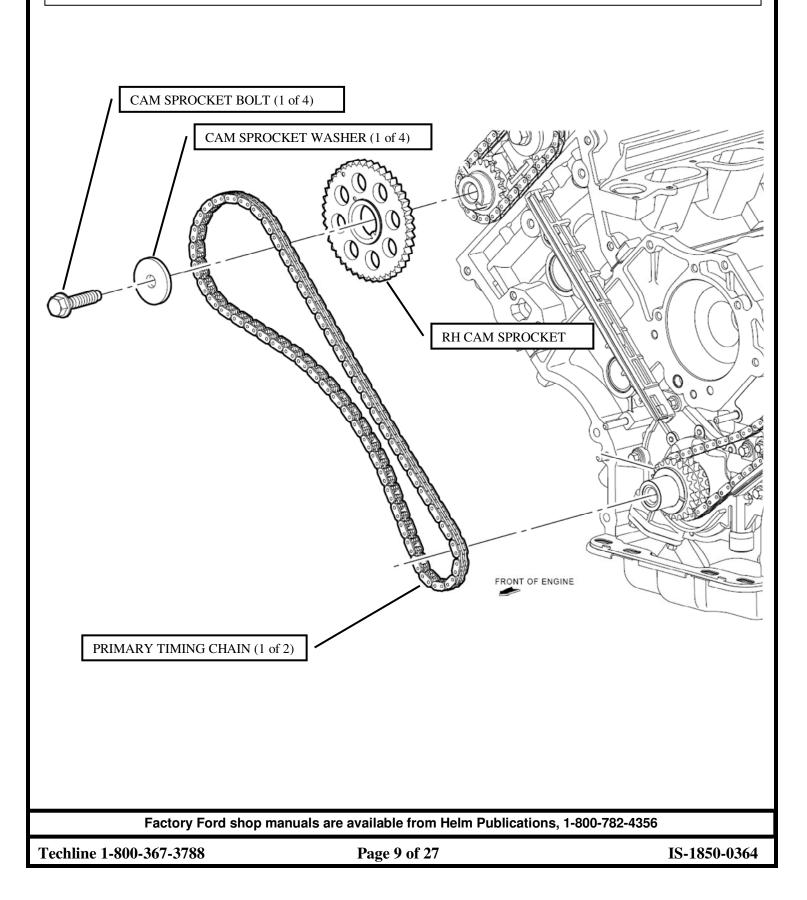



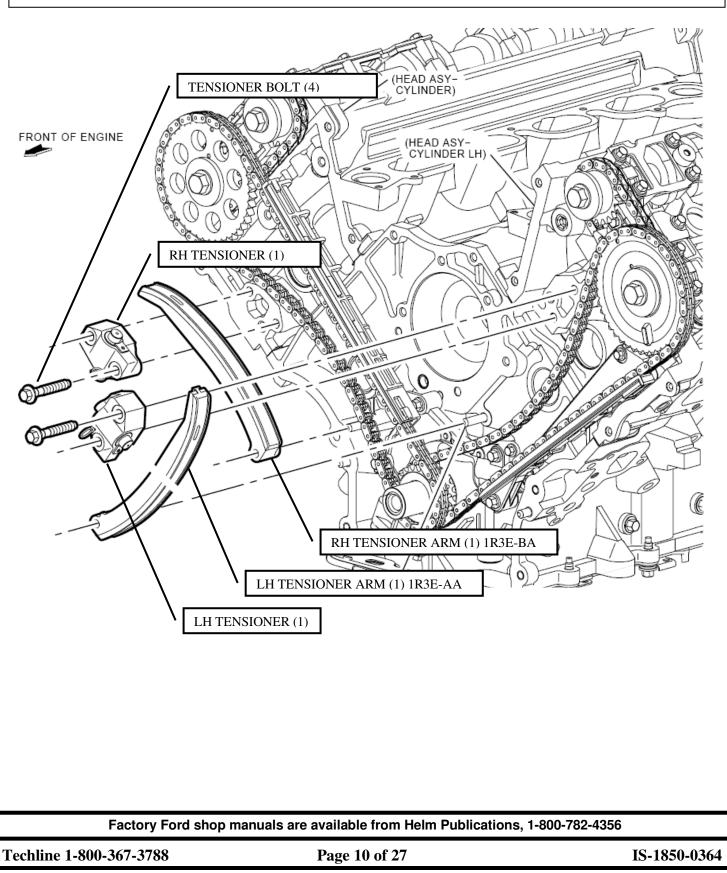




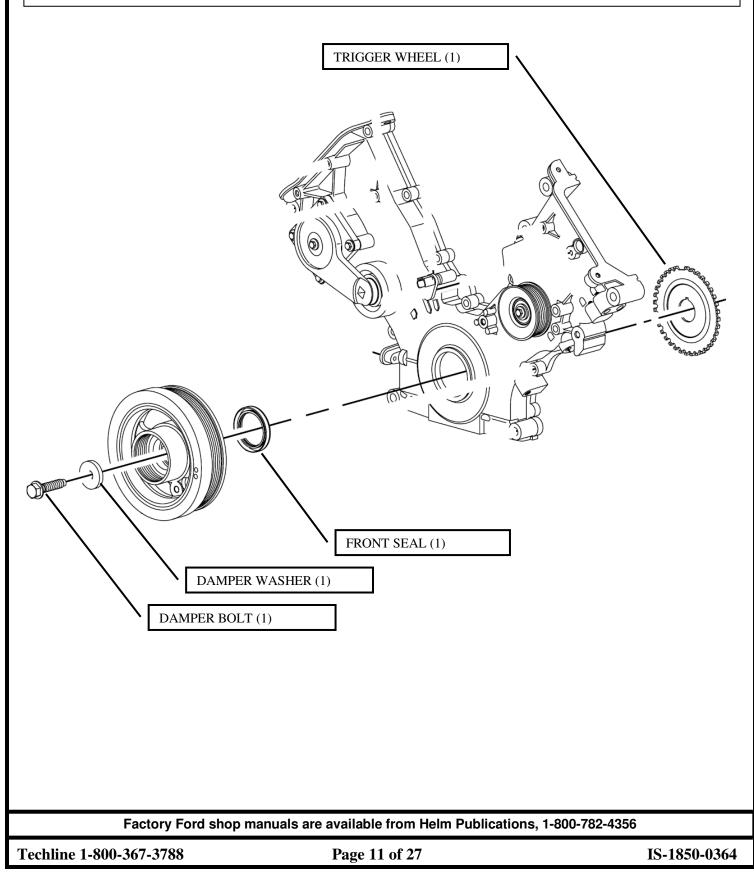



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

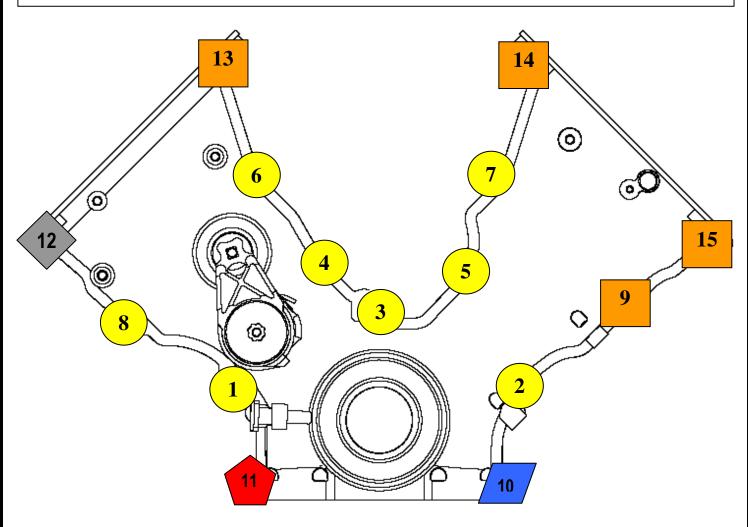

4.6R (4V) Ford Racing - Naturally Aspirated Front Cover Bolt Placement

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 12 of 27



Techline 1-800-367-3788

M-6004-A464 4.6L 4V AL Timing Kit INSTALLATION INSTRUCTIONS

NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

4.6R (4V) Ford Racing - Naturally Aspirated Front Cover Bolt Placement


| HOLE NO. | FASTENER | PART NUMBER | TORQUE |
|-------------|----------|-------------|----------|
| | | N808586 | 20-30 Nm |
| | | N806300 | 20-30 Nm |
| | | N806177 | 20-30 Nm |
| | | W706508 | 20-30 Nm |
| | | W706560 | 20-30 Nm |

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Page 13 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

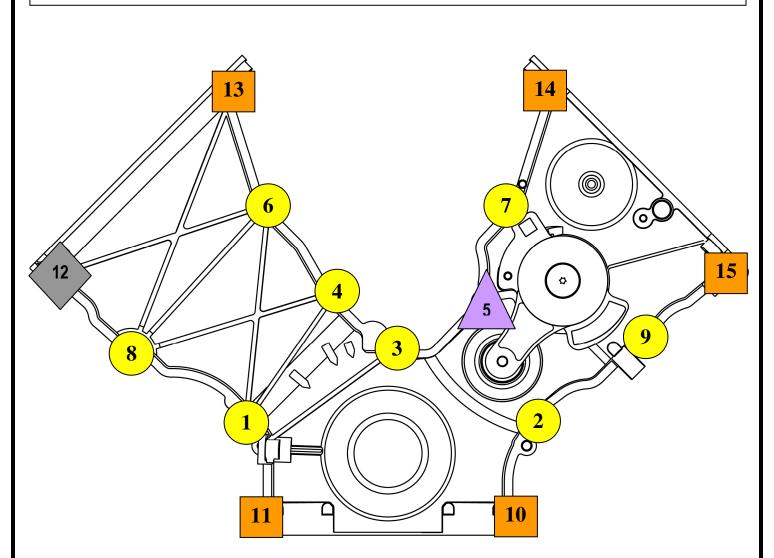

4.6R (4V) Ford Racing – Supercharged Front Cover Bolt Placement

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Page 14 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

4.6R (4V) Ford Racing – Supercharged Front Cover Bolt Placement

| HOLE NO. | FASTENER | PART NUMBER | TORQUE |
|-------------|----------|-------------|----------|
| | | N806300 | 20-30 Nm |
| | | N806177 | 20-30 Nm |
| \bigcirc | | W706560 | 20-30 Nm |
| | | W705128 | 20-30 Nm |

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 15 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

WARNING: The installation of all gears and chains is done with the cam followers removed. Follower installation is done after the gears and chains are in place and properly timed.

CAMSHAFT GEAR AND CHAIN INSTALLATION:


STEP 1: Install the tensioner. **NOTE:** LH tensioner is shown, RH tensioner is similar.



STEP 2: Install the camshaft sprockets and the chain as an assembly.

!!! CAUTION: Timing marks must be at 12 o'clock and camshaft keyways indexed at 6 o'clock. !!!

STEP 3: Install the special tool. Tool is designed to hold the camshafts stationary. (TOOL NOT INCLUDED)



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 16 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.


STEP 4: Install the camshaft spacer, washer and bolt, and hand-tighten the bolt.



STEP 5: Install the camshaft sprocket, washer and bolt, and hand-tighten the bolt.



- **STEP 6:** Tighten the bolts in two stages:
 - a. Stage 1: Tighten to 40 Nm (30 lb-ft).
 - b. Stage 2: Tighten an additional 90 degrees.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 17 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

STEP 7: Remove the special tool.




INSTALLATION OF TIMING COMPONENTS:

Engines with non-ratcheting timing chain tensioners:

WARNING: The installation of all gears and chains is done with the cam followers removed. Follower installation is done after the gears and chains are in place and properly timed.

!!! CAUTION: Timing chain procedures must be followed exactly or damage to the pistons or valves may result. !!!

- NOTE: Tensioners ship with clip installed
- **STEP 1:** Compress the tensioner plunger, using a soft-jawed vise.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788


Page 18 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

STEP 2:

- Install a retaining clip on the tensioner to hold the plunger in during installation.
 - Remove the tensioner from the vise.




Engines with ratcheting timing chain tensioners:

!!! CAUTION: Timing chain procedure must be followed exactly or damage to valves and pistons will result. !!!

!!! CAUTION: Do not compress the ratchet assembly. This will damage the ratchet assembly. !!!

STEP 3: Compress each tensioner plunger using an edge of a vise. **NOTE:** LH shown, RH similar.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 19 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.


STEP 4: Using a small screwdriver or pick, push back and hold the ratchet mechanism.



STEP 5: While holding the ratchet mechanism, push the ratchet arm back into the tensioner housing.



- **STEP 6:** Insert a paper clip into the hole of each tensioner housing to hold the ratchet assembly and plunger in during installation.
 - Remove the tensioner from the vise.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 20 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

- **STEP 7:** Install the exhaust camshaft sprocket.
 - Stage 1: Tighten to 40 Nm (30 lb-ft).
 - Stage 2: Tighten an additional 90 degrees.




All engines:

STEP 8: If the copper links are not visible, mark one link on one end and one link on the other end, and use as timing marks.



STEP 9: Install the timing chain guides.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 21 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.


STEP 10: Rotate the LH camshaft sprocket until the timing mark is approximately at the 12 o'clock position. Rotate the RH camshaft timing sprocket until the timing mark is approximately in the 11 o'clock position.



!!! CAUTION: Unless otherwise instructed, at no time when the timing chains are removed and the cylinder heads are installed is the crankshaft or the camshaft to be rotated. Severe piston and valve damage will occur if cam followers are installed. !!!

!!! CAUTION: Rotate the crankshaft counterclockwise only. Do not rotate past position shown or severe piston or valve damage will occur if cam followers are installed. !!!

STEP 11: Using the special tool, position the crankshaft so that the number one cylinder is at top dead center (TDC). (TOOL NOT INCLUDED)
NOTE: The number one cylinder is at TDC when the stud on the engine block fits into the slot in the handle of the special tool.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 22 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.


STEP 12: Install the crankshaft sprocket with the flange facing forward.



STEP 13: Position the LH (inner) timing chain on the crankshaft sprocket, aligning the copper (marked) link with the timing mark on the sprocket.



STEP 14: Install the LH timing chain onto the crankshaft sprocket, aligning the copper (marked) link with the timing marks on the sprocket.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356


Techline 1-800-367-3788

Page 23 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

STEP 15: Position the LH timing chain tensioner arm on the dowel pin and install the LH timing chain tensioner. **NOTE:** The LH timing chain tensioner arm has a bump near the dowel hole for identification.




Engines with non-ratcheting timing chain tensioners:

STEP 16: Remove the retaining clips from the LH timing chain tensioner.



Engines with ratcheting timing chain tensioners:

STEP 17: Remove the retaining clip from the LH timing chain tensioner.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788


Page 24 of 27




NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

All engines:


STEP 18: Position the RH (outer) timing chain on the crankshaft sprocket, aligning the copper (marked) link with the timing mark on the sprocket.



STEP 19: Install the RH timing chain onto the crankshaft sprocket, aligning the copper (marked) link with the timing marks on the sprocket.



STEP 20: Position the RH timing chain tensioner arms on the dowel pin and install the RH timing chain tensioner.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788


Page 25 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.


Engines with non-ratcheting timing chain tensioners:

STEP 21: Remove the retaining clips from the RH timing chain tensioner.




Engines with ratcheting timing chain tensioners:

STEP 22: Remove the retaining clip from the RH timing chain tensioner.



All engines:

STEP 23: Make sure that the copper (marked) chain links are lined up with the dots on the crankshaft sprockets and the camshaft sprocket.



Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 26 of 27



NO PART OF THIS DOCUMENT MAY BE REPRODUCED WITHOUT PRIOR AGREEMENT AND WRITTEN PERMISSION OF FORD RACING PERFORMANCE PARTS.

- **STEP 24:** Position the piston of the cylinder you are installing the cam followers on at the bottom of the stroke and the camshaft lobe at the base circle.
- **STEP 25:** Using the proper tool, compress the intake valve spring and install the roller followers in their original locations.

Factory Ford shop manuals are available from Helm Publications, 1-800-782-4356

Techline 1-800-367-3788

Page 27 of 27